


CS5P

200/210/220/230/240

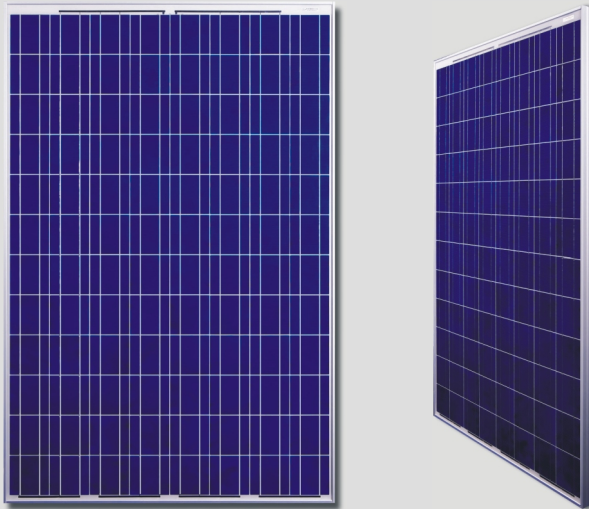

Key Features

- Strong framed module, passing mechanical load test of 5400Pa to withstand heavier snow load
- Industry leading power tolerance : $\pm 5W$ ($\pm 2.1\%$)
- 25 years module power output warranty
- The 1st manufacturer in PV industry certified for ISO:TS16949 (The automotive quality management system) in module production since 2003
- ISO17025 qualified manufacturer owned testing lab (pending), fully complying to IEC, TUV, UL testing standards

On-grid Module

CS5P is a robust big solar module with 96 solar cells. These modules can be used for on-grid solar applications. Our meticulous design and production techniques ensure a high-yield, long-term performance for every module produced. Our rigorous quality control and in-house testing facilities guarantee Canadian Solar's modules meet the highest quality standards possible.

Applications

- On-grid residential roof-tops
- On-grid commercial/industrial roof-tops
- Solar power stations
- Other on-grid applications

Quality Certificates

- IEC 61215, IEC61730, TUV Safety Class II, UL 1703, CE
- ISO9001:2000: Standards for quality management systems
- ISO/TS16949:2002: The automotive quality management system
- QC080000 HSPM: The Certification for Hazardous Substances Regulations



CS5P-200/210/220/230/240

Electrical Data


	CS5P-200	CS5P-210	CS5P-220	CS5P-230	CS5P-240
Nominal Maximum Power at STC (Pmax)	200W	210W	220W	230W	240W
Optimum Operating Voltage (Vmp)	46.4V	46.6V	46.9V	47.5V	48.1V
Optimum Operating Current (Imp)	4.31A	4.51A	4.69A	4.84A	4.99A
Open Circuit Voltage (Voc)	57.4V	57.9V	58.4V	58.8V	59.3V
Short Circuit Current (Isc)	4.78A	4.94A	5.10A	5.25A	5.40A
Operating Temperature	-40°C~+85°C				
Maximum System Voltage	1,000V (IEC) /600V (UL)				
Maximum Series Fuse Rating	10A				
Power Tolerance	± 5W				
Temperature Coefficient	Pmax	-0.45%/°C			
	Voc	-0.35%/°C			
	Isc	0.060%/°C			
	NOCT	45°C			

Under Standard Test Conditions (STC) of irradiance of 1000W/m², spectrum AM 1.5 and cell temperature of 25°C

Mechanical Data


Cell Type	Poly-crystalline / Mono-crystalline
Cell Arrangement	96 (8 x 12)
Dimensions	1602 x 1061 x 40mm (63.1 x 41.8 x 1.57in)
Weight	20kg (44.1 lbs)
Front Cover	Tempered glass
Frame Material	Anodized aluminium alloy
Standard Packaging (Modules per Pallet)	20pcs

Engineering Drawings

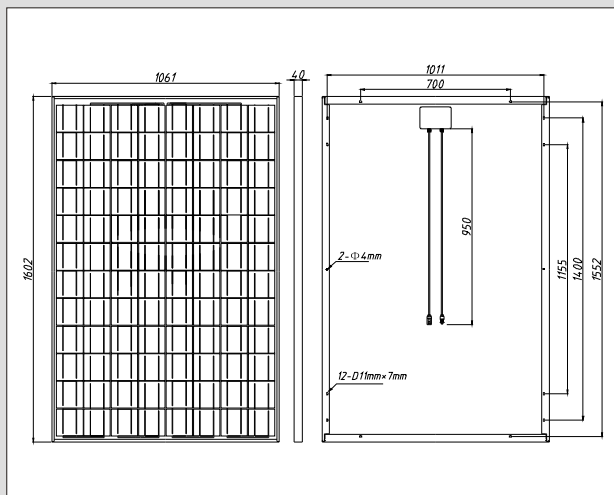

*Specifications included in this datasheet are subject to change without prior notice.

I-V Curves

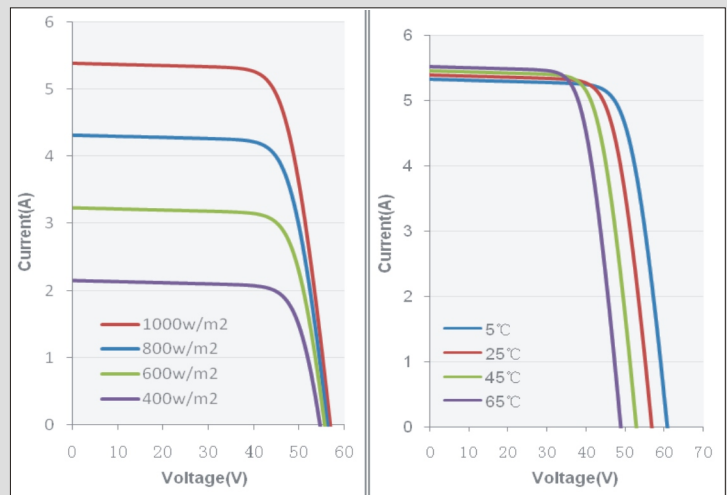

About Canadian Solar

Canadian Solar is a vertically-integrated manufacturer of ingots, wafers, cells, solar modules and custom-designed solar power applications. Canadian Solar was founded in Canada in 2001 and was successfully listed on NASDAQ Exchange (symbol: CSIQ) in November 2006.

By the end of 2008, Canadian Solar has a module capacity of over 600MW. With revenue of 709.2 million dollars in 2008, a 134% growth in revenue over 2007, Canadian Solar has become one of the fastest-growing companies in the solar industry.

Headquarters | 675 Cochrane Drive | East Tower 6th Floor
 Markham, Ontario | Canada, L3R 0B8
 Tel: +1-905-530-2334
 Fax: +1-905-530-2001
inquire.ca@canadian-solar.com
www.canadian-solar.com