

## SUNNY BOY 3000US / 4000US

- > UL1741/IEEE 1547 compliant
- > 10 yr. standard warranty
- > Improved CEC efficiency
- > Integrated load-break rated DC disconnect switch
- > Integrated fused series string combiner
- > Sealed electronics enclosure & Opticool
- > Comprehensive SMA communications and data collection options
- > Ideal for residential or light commercial applications
- > Rugged cast aluminum outdoor rated enclosure



## SUNNY BOY 3000US / 4000US

The best in their class

SMA is proud to introduce our new line of inverters updated with our latest technology and designed specifically to meet IEEE 1547 requirements. Compact design makes them ideal for residential use and the integrated DC disconnect makes installation more cost effective. They are field-configurable for positive ground systems making them more versatile than ever. Increased efficiency means better performance and shorter payback periods. With over 750,000 fielded units, Sunny Boy has become the benchmark for PV inverter performance and reliability throughout the world.



# Technical Data


## SUNNY BOY 3000US / 4000US

	SB 3000US	SB 4000US
Max. Recommended Array Input Power (DC @ STC)	3750 W	5000 W
Max. DC Voltage	500 V	600 V
Peak Power Tracking Voltage	180 - 400 V @ 208 V 200 - 400 V @ 240 V	220 - 480 V @ 208 V 250 - 480 V @ 240 V
DC Max. Input Current	17 A	18 A
DC Voltage Ripple	< 5%	< 5%
Number of Fused String Inputs	4	4
PV Start Voltage	228 V	285 V
AC Nominal Power	3000 W	3500 W @ 208 V / 4000 W @ 240 V
AC Maximum Output Power	3000 W	4000 W
AC Maximum Output Current	15 A @ 208 V, 12.5 A @ 240 V	17 A @ 208 V, 16.6 A @ 240 V
AC Nominal Voltage / Range	183 - 229 V @ 208 V 211 - 264 V @ 240 V	183 - 229 V @ 208 V 211 - 264 V @ 240 V
AC Frequency / Range	60 Hz / 59.3 Hz - 60.5 Hz	60 Hz / 59.3 Hz - 60.5 Hz
Power Factor	1	1
Peak Inverter Efficiency	96.6 %	96.8 %
CEC weighted Efficiency	95.0 % @ 208 V 95.5 % @ 240 V	95.5 % @ 208 V 96.0 % @ 240 V
Dimensions W x H x D in inches	17.8 x 13.8 x 9.3	17.8 x 13.8 x 9.3
Weight / Shipping Weight	88 lbs / 94 lbs	88 lbs / 94 lbs
Ambient temperature range	-13 to +113 °F	-13 to +113 °F
Power Consumption: standby / nighttime	< 7 W / 0.1 W	< 7 W / 0.1 W
Topology	PWM, true sinewave, current source	PWM, true sinewave, current source
Cooling Concept	Convection, regulated fan cooling	Convection, regulated fan cooling
Mounting Location Indoor / Outdoor (NEMA 3R)	● / ●	● / ●
LCD Display	●	●
Lid Color: aluminum / red / blue / yellow	● / ○ / ○ / ○	● / ○ / ○ / ○
Communication: RS485 / Wireless	○ / ○	○ / ○
Warranty: 10-year	●	●
Compliance: IEEE-929, IEEE-1547, UL 1741, UL 1998, FCC Part 15 A & B	●	●

Specifications for nominal conditions

● Included ○ Option – Not available

### Efficiency Curves

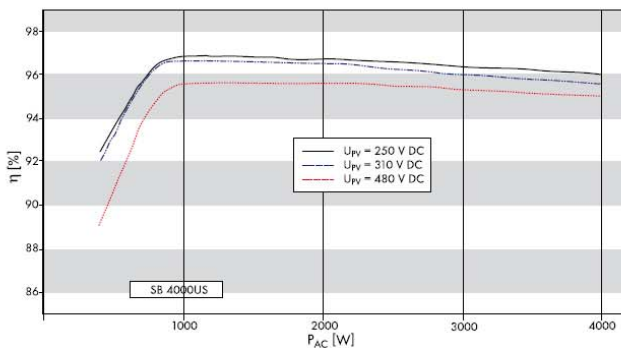

Sold by:

www.SMA-America.com  
 Phone 916 625 0870  
 Toll Free 888 4 SMA USA

Supplied by:

groSolar®  
 groSolar.com  
 800.467.6527  
 OR CCB Lic #180494  
 What the World Needs. NOW\*